


# 500ED Tripod dvostruka barijera

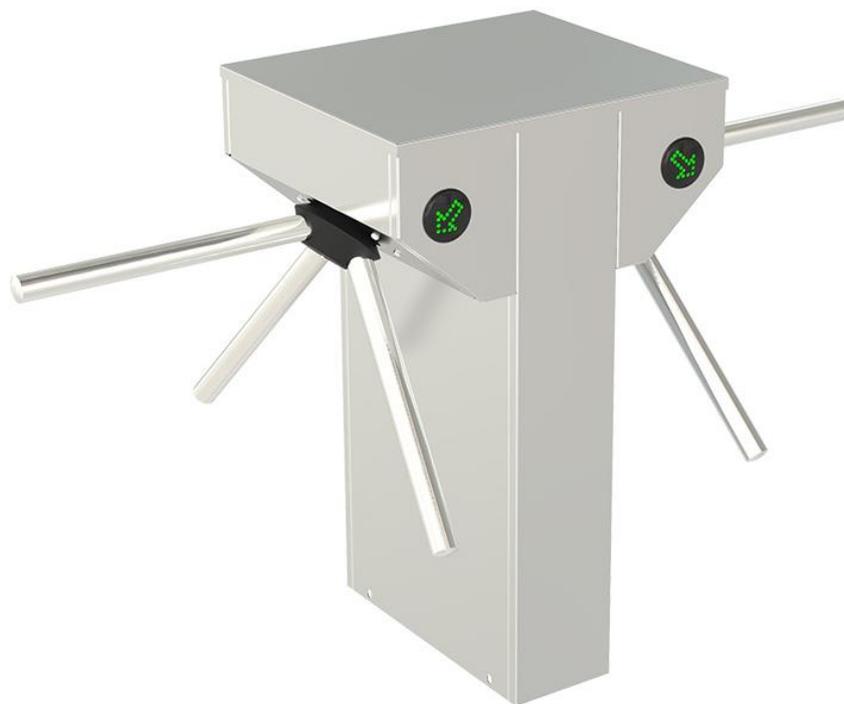

# 500ED Specifikacije

<b>Power Requirements</b>	110/220V. 60/50Hz. AC (%±10) 24V. DC at standby ~22W. max. ~120W
<b>Dimensions</b>	500x955x600 + arm length (2x470mm)
<b>Arms</b>	Single-sided. Ø40mmx2mm 304-Grade (Opt. 316-Grade) Stainless steel (Opt. Anodised hard aluminium). Arms can be dismantled or mounted one by one separately
<b>Body Features</b>	1,5mm 304-Grade (Opt. 316-Grade) Stainless steel with brushed (Opt. Satin) surface protected against water for outdoors use
<b>Indicator Features</b>	Green Arrow & Red Bar LED
<b>Operating Temperature, Humidity, IP Rating, MCBF</b>	-20°C to +68°C (Opt. -50°C with heater unit) / RH 95% non-condensing / IP 54 Outdoor Model (Opt. IP 56) / 1M Cycles
<b>Control System</b>	All inputs are opto-coupler protected .Controlled by dry contact or grounding input. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
<b>Operation</b>	Bi-directional passage, manually (Opt. Motorized) operated system.
<b>Output Data</b>	The system provides dry contact passage feedback by relays.
<b>Emergency Mode</b>	(Standard: Fail Safe); in case of power failure or emergency, the arms rotate freely to allow rapid passage (Opt. Fail Secure).
<b>Flow Rate</b>	Capacity of Mechanism (Manual System): ~90 passages/minute (for double sided 90+90=180) Nominal: ~25 - 46 passage-per-minute (for double sided=*2)(Recommended reference figure) <b>Explanatory Notes:</b> - The above given figures are approximate for one person per walkway or lane. - The system allows the new passage authorisation in less than ~0, 3 seconds. After the passage authorization, the total passage time depends on the pushing and passage speed of the people. - Utilisation of different access control units can change the flow rate.
<b>Standard Features</b>	Direction and status indicators
<b>Optional Accessory and Applications</b>	Remote control units, interface unit for PC, RS485, RS232 and LAN, counter, audiomessaging system, motor driven unit, automatic drop (retractable) arm, alarm sensor, heater positive unit, coin slot/intelligent coin system and coin box, card reader pole, pipe barrier (Separator), floor mounting plate.

# 500ED Tripod dvostruka barijera

